



HUBER+SUHNER® ANTENNA PRODUCT FOR WIRELESS COMMUNICATION

CPE Enclosure



Antenna is not included

Technical Data

Mechanical & Environmental Properties

Dimensions - Internal space	254 x 254 x 76.20 mm (10.0" x 10.0" x 3.0")
Weight	2.5 kg (5.51 lbs.)
Enclosure material	aluminium AL380
Enclosure colour	RAL 9002
2002/95/EC (RoHS)	compliant
Operating temperature range	- 55°C to + 70°C
Storage temperature range	- 55°C to + 70°C
Max. Power dissipation	20 W
Vibration	IEC 60721 3-4 4M5 Random
Mechanical Shock	IEC 60721 3-4 4M5
IP Rating	IP 67
Humidity	100%
Solar Radiation	ASTM G53 1000h
Salt Fog	IEC 8-2-11 Ka 500 hours

Available Types	Article no.	
9091.99.0198	84017536	Cable entry with cable gland including Cat 5 or N-Female connection possibilities

Sidetilt/downtilt bracket 9091.99.0201 included for wall and mast mount


Documents	
01.02.0777	security instruction
01.02.1022	mounting instruction



HUBER+SUHNER® ANTENNA PRODUCT FOR WIRELESS COMMUNICATION

CPE Enclosure

Dimensions (mm)

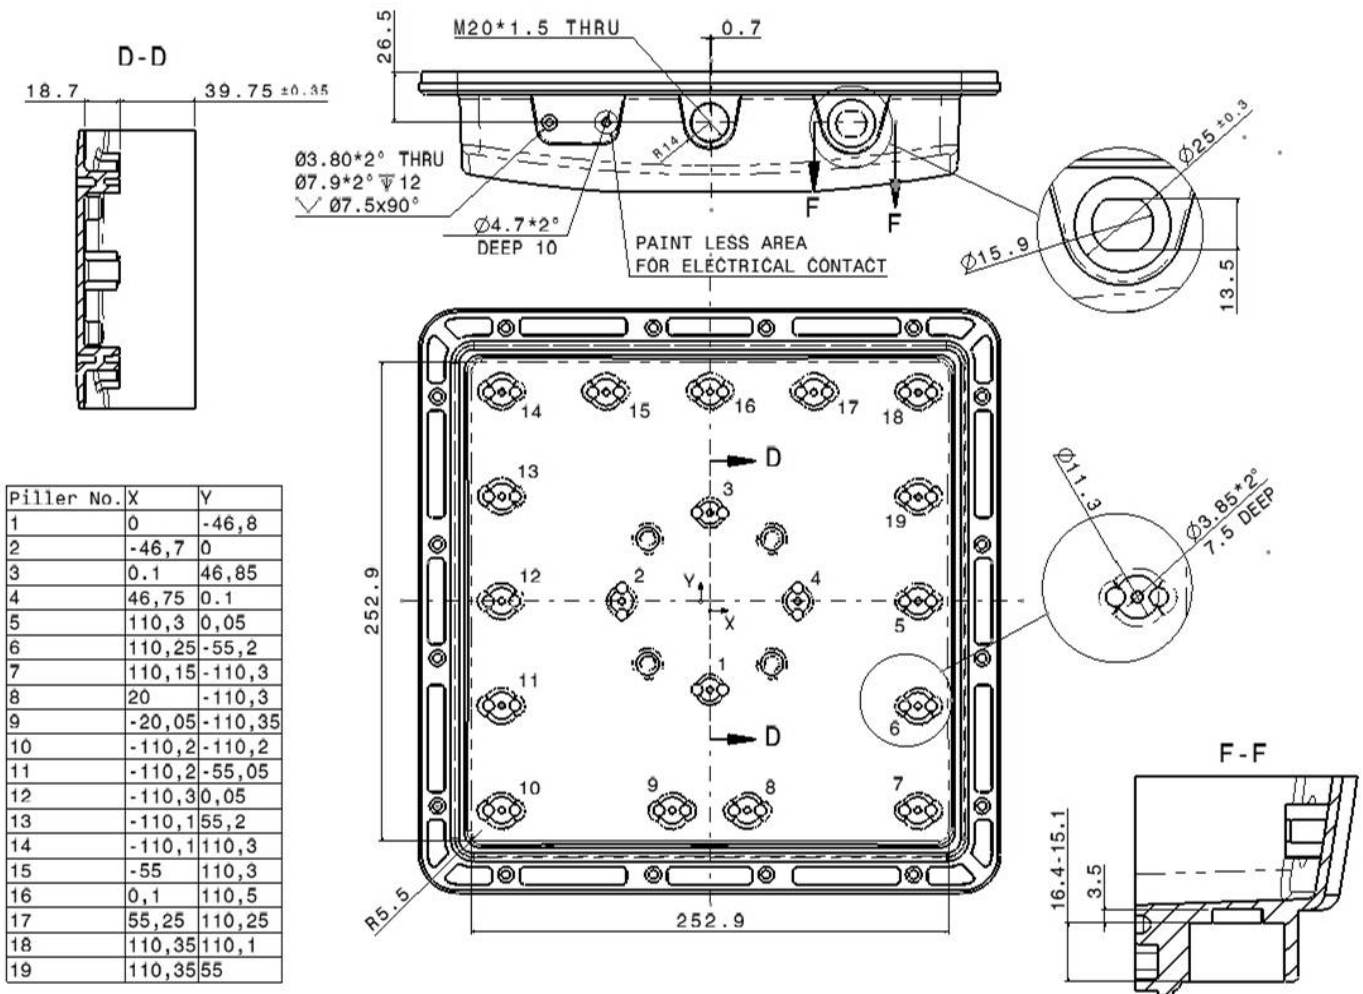

HUBER+SUHNER is certified according to ISO 9001 and ISO 14001

WAIVER!

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical contained specifications and/or the fitness for any particular purpose. The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.

HUBER+SUHNER – Excellence in Connectivity Solutions

Document no.: 01.02.1180
Issue no.: 5
Supersedes: 04.2006

Uncontrolled Copy

Issued/Checked/Released: 4159/4656/08.2005
Last amended: 4417/08.2006



HUBER+SUHNER AG
RF Technology
9100 Herisau, Switzerland

Phone +41 (0)71 353 41 11
Fax +41 (0)71 353 47 51
www.hubersuhner.com